



ADVANCE PRODUCT SERVICE INFORMATION

INFORMATION BULLETIN #17

DATE 8/96

SUBJECT BLOWER HOUSINGS, Revised Procedure for Installing

FILE IN MS-4750

Sec. No. 7A

MODEL SERIES 95900, 98900, 10A900

Dated Nov. 94

The following information will be added to MS-4750 at the next revision.

Blower housing screw tightening sequence, Fig. 1, is recommended whenever a blower housing is being removed and/or installed. Torque screws to 85 in. lbs.

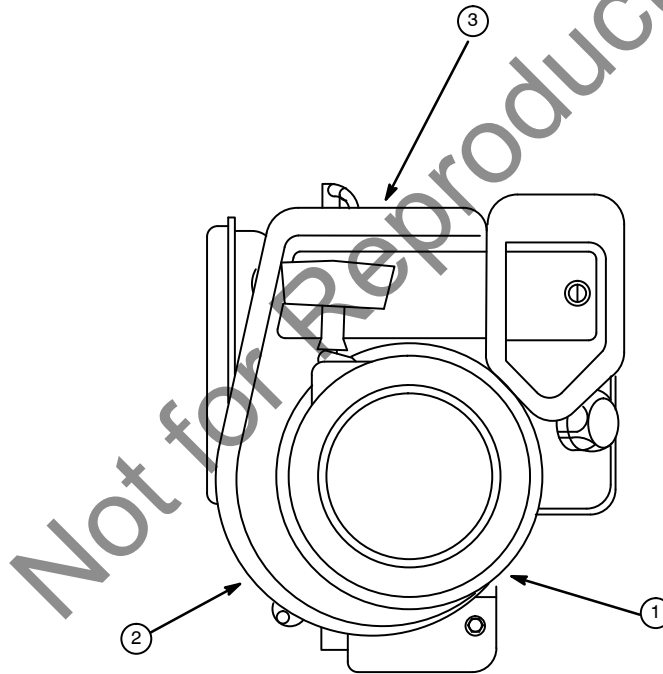


Fig. 1

BRIGGS & STRATTON CORPORATION
Distribution Sales & Service Division